



NORTH AMERICAN POLYMER COMPANY



POLY-GLASS® SILICONE DIGESTER

EQUIPMENT, SUPPLIES, AND TRAINING FOR THE PROFESSIONAL REFINISHER

Since 1979 NAPCO has been making bathtub refinishers happy.

We offer the highest quality refinishing coatings and equipment to get the job done right – the first time. Your ordering experience will be a breeze with our professional customer service.

You can rely on us for bath tub resurfacing expertise so you get the right product for your specific situation. Order your countertop and tub refinishing supplies and equipment online, 24/7. We offer the industries best hands-on bathtub, tile, sink and counter top reglazing training in convenient 3-day classes.


North American Polymer Company, LTD.
7315 Hamlin Avenue
Skokie, IL 60076.3902
800.888.1081

Silicone is one of the world's most stubborn substances. Not only that, it can make an otherwise beautiful refinishing job look terrible.

You won't know until you're done. Take the bull by the horns with our Silicone Digester. This powerhouse makes short work of silicone. Simply wipe it on; it does the rest. Not just spreading the silicone around but actually "eating" it up and making it disappear. It's an eating machine, like a teenage boy at dinner time.

APPLICATION: Protect hands with solvent-resistant gloves and eyes with safety glasses. Using a respirator mask or Fresh Air Breathing System is recommended. Cut the existing silicone caulk bead out with a utility knife or razor blade and remove. For the average sized bathtub, pour 2 oz. Silicone Digester into a solvent resistant measuring cup. Using a natural hair paintbrush, dab the Silicone Digester onto the remaining silicone "skin" (residue). Allow to sit for 8-10 minutes. Rinse well with water while scrubbing with an abrasive scrub pad or 80 Grit wet/dry sandpaper. Inspect and reapply if needed. For best results, use in temperatures between 40°F and 85°F in a well-ventilated area. Ground containers when transferring liquids to prevent static accumulation. Empty containers should be completely drained properly banded, and returned to supplier or disposed of in an environmentally safe manner.

STORAGE TEMPERATURE: 40°F AND 85°F

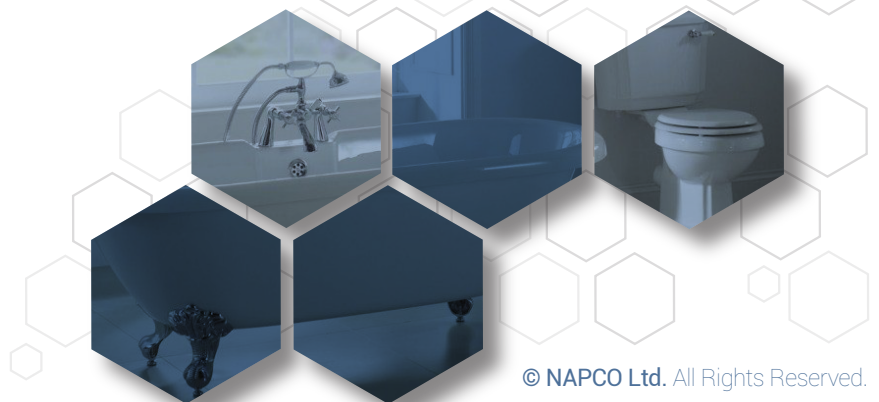

© NAPCO Ltd. All Rights Reserved.